

FLIGHT SUMMARY REPORT

Flight Number: 98-001-02
Calendar/Julian Date: 04 October 1997 • 277
Sensor Package: Thermal Infrared Multispectral
Scanner (TIMS)
DoE Multispectral Scanner (MSS)
Area(s) Covered: Ray Mines/Globe, AZ (Site 854)

Investigator(s): Mace, EPA

Aircraft #: 799
Department of Energy
Cessna Citation

SENSOR DATA

Accession #:	----	----
Sensor ID #:	086	1268
Sensor Type:	TIMS	MSS
Focal Length:	----	----
Film Type:	----	----
Filtration:	----	----
Spectral Band:	----	----
f Stop:	----	----
Shutter Speed:	----	----
# of Frames:	----	----
% Overlap:	----	----
Quality:	Good	Good
Remarks:		

Airborne Science and Applications Program

The Airborne Science Branch at NASA's Dryden Flight Research Center, Edwards, California, operates two ER-2 high altitude aircraft in support of NASA earth science research. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and in situ data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensor(s) and camera(s) used for data collection during this flight.

Department of Energy Remote Sensing Laboratory

The NASA Airborne Science and Applications Program at Ames Research Center contracted with the Department of Energy Remote Sensing Laboratory (RSL) in Las Vegas, Nevada to fly the RSL Multispectral Scanner (MSS) and the NASA Thermal Infrared Multispectral Scanner (TIMS) over the desert southwest. The scanners were flown on the DOE Cessna Citation.

The Cessna Citation is a low and medium altitude, moderate speed aircraft. It can operate from 4,000 to 35,000 feet above sea level at speeds between 135 and 225 knots. There are two instrument ports in the aircraft. The RSL 1268 Multispectral Scanner was mounted over the aft port and the NASA Thermal Infrared Multispectral Scanner was mounted over the forward port.

RSL Daedalus 1268 MSS

The DOE Multispectral Scanner simulates the spectral characteristics the Thematic Mapper (TM) multispectral scanners orbiting on Landsat 4 and Landsat 5. The seven TM bands are replicated with the MSS and four additional bands of discrete wavelengths are acquired. THE MSS acquires TM band six (thermal data) as two bands in low and high gain settings. The scanner is configured as follows:

<u>Daedalus Channel</u>	<u>TM Band</u>	<u>Wavelength, mm</u>
1	A	0.42 - 0.45
2	1	0.45 - 0.52
3	2	0.52 - 0.60
4	B	0.60 - 0.62
5	3	0.63 - 0.69
6	C	0.69 - 0.75
7	4	0.75 - 0.90

8	D	0.91 - 1.05
9	5	1.55 - 1.75
10	7	2.08 - 2.35
11	6	8.5 - 12.5 low gain
12	6	8.5 - 12.5 high gain

Sensor/aircraft parameters are as follows:

IFOV:	2.5 mrad
Total Scan Angle:	86°
Pixels/Scan Line:	716
Scan Rate:	12.5/25/50/100 scans/second

Thermal Infrared Multispectral Scanner

The Thermal Infrared Multispectral Scanner (TIMS) is a multispectral scanning system using a dispersive grating and a six element mercury cadmium telluride detector array to produce six discrete channels in the 8.2 *mm* to 12.2 *mm* region.

<u>Channel</u>	<u>Wavelength, <i>mm</i></u>	<u>NET</u>
1	8.2 - 8.6	< 0.3° C
2	8.6 - 9.0	< 0.3° C
3	9.0 - 9.4	< 0.3° C
4	9.4 - 10.2	< 0.3° C
5	10.2 - 11.2	< 0.3° C
6	11.2 - 12.2	< 0.3° C

Sensor/aircraft parameters are as follows:

IFOV:	2.5 mrad
Ground Resolution:	163 feet (50 meters) at 65,000 feet
Total Scan Angle:	76.56°
Swath Width:	16.9 nmi (31.3 km) at 65,000 feet
Pixels/Scan Line:	638
Scan Rate:	7.3 (scans/second)
Ground Speed:	400 kts. (206 m/second)

Information on data tape format, logical record format, and scanner calibration data may be obtained from the Aircraft Data Facility, NASA-Ames Research Center, Mail Stop 240-6, Moffett Field, California 94035-1000 (Telephone: 650-604-6252).

DoE DAEDALUS TMS FLIGHT DATA
FLIGHT NUMBER: 98-001-02

Site	Line	Run	A c t u a l t i m e (GMT) b e g i n e n d	A c t u a l scanline begin e n d	Altitude feet/meter	Scan Speed (rps)	total G o o d scanlines	total Interpolated scanlines	total Repeated scanlines
1.	854	1 1	11:07:07.0 11:10:29.9	36241 41305	6500/ 1981	25.00	5065	0	0
2.	854	3 1	11:14:35.0 11:17:58.0	47416 52487	6500/ 1981	25.00	5072	0	0
3.	854	5 1	11:21:47.0 11:25:15.9	58197 63411	6500/ 1981	25.00	5215	0	0
4.	854	7 1	11:29:10.0 11:32:33.1	69246 74313	6500/ 1981	25.00	5068	0	0
5.	854	8 1	11:36:47.0 11:40:14.9	80653 85838	6500/ 1981	25.00	5186	0	0
6.	854	6 1	11:44:01.0 11:47:28.1	91474 96641	6500/ 1981	25.00	5168	0	0
7.	854	4 1	11:51:23.0 11:54:54.0	102500 107766	6500/ 1981	25.00	5267	0	0
8.	854	2 1	11:58:45.0 12:02:10.9	113529 118667	6500/ 1981	25.00	5139	0	0

Notes: Site 854 Globe Arizona (Ray Mines) - Predawn Flight

TIMS FLIGHT DATA
FLIGHT NUMBER: 98-001-02


	Check Points			A c t u a l t i m e (GMT) b e g i n e n d	A c t u a l scanline begin e n d	Altitude feet/meter	Scan Speed (rps)		total G o o d scanlines	total Interpolated scanlines	total Repeated scanlines
1.	854	1	1	11:07:07.0 11:10:29.9	35829 40879	6500/ 1981	25.00		5051	0	0
2.	854	3	1	11:14:35.0 11:17:58.0	46974 52024	6500/ 1981	25.00		5051	0	0
3.	854	5	1	11:21:47.0 11:25:15.9	57720 62919	6500/ 1981	25.00		5200	0	0
4.	854	7	1	11:29:10.0 11:32:32.8	68740 73790	6500/ 1981	25.00		5051	0	0
5.	854	8	1	11:36:47.0 11:40:15.0	80109 85283	6500/ 1981	25.00		5175	0	0
6.	854	6	1	11:44:01.0 11:47:27.9	90905 96055	6500/ 1981	25.00		5151	0	0
7.	854	4	1	11:51:23.0 11:54:53.8	101900 107149	6500/ 1981	25.00		5250	0	0
8.	854	2	1	11:58:45.0 12:02:10.9	112895 118020	6500/ 1981	25.00		5126	0	0

Notes: Site 854 Globe Arizona (Ray Mines) - Predawn Flight



+ -110
32

32 + -108

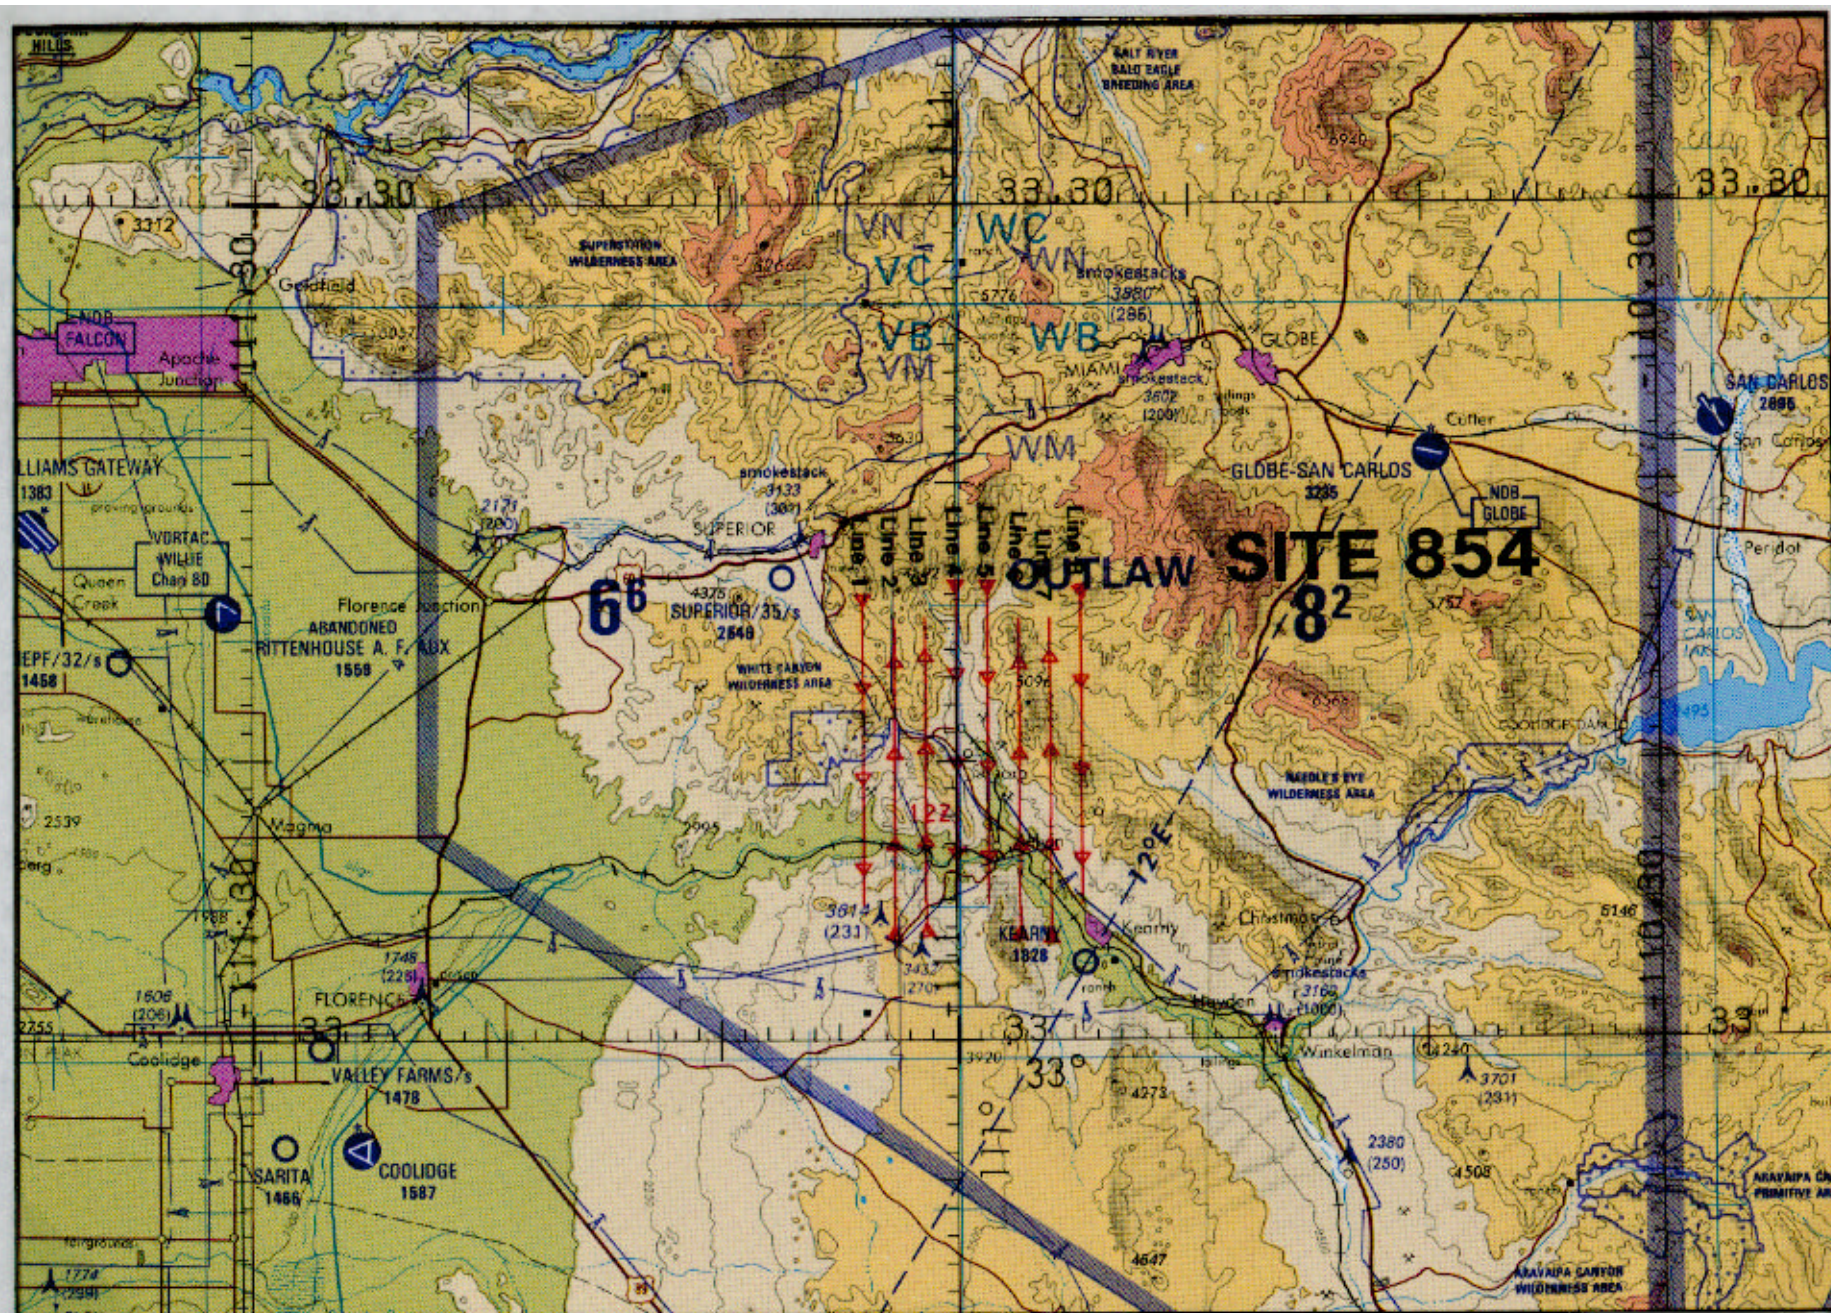

FLIGHT 98-001-02

4 OCTOBER 1997

R/C 799

TIMS / DOE MSS 1268

TPC G-190